



surface
care
solutions

Care and Maintenance Sheet

AGGLOTECH[®]
ARCHITECTURAL TERRAZZO



Recommended by over
240 INTERNATIONAL TOP BRANDS
manufacturers of materials for floors and wall coverings

Fila Industria Chimica Spa
Via Garibaldi, 58 - 35018 - S. Martino di Lupari (PD) - Italy
Tel. +39 049 9467300

filasolutions.com



surface
care
solutions

Care & Maintenance Sheet

The following Maintenance sheet is intended to provide useful information for the correct maintenance of the material supplied by Agglotech. The purpose of these instructions is to explain the methods of use and application of FILA products and the tools required to carry out periodic maintenance of the ordinary type, which involves daily frequencies, and the extraordinary type, which involves weekly or monthly frequencies as required. The manual is divided into sections as follows.

INITIAL CLEANING

Pg. 3

PROTECTION

Pg. 4

DIRT-REPELLENT FINISH

Pg. 5

ORDINARY MAINTENANCE

Pg. 6

EXTRAORDINARY MAINTENANCE

Pg. 7

In order to preserve at the best the material over time, follow all the steps reported in the manual.

Le modalità d'uso e le procedure d'applicazione dei prodotti consigliati sono il risultato di precise verifiche da parte del laboratorio. Esistono comunque dei fattori che sfuggono alla nostra influenza: stato della superficie prima del trattamento, caratteristiche/finiture del materiale particolarmente rare o non specificate, condizioni ambientali, professionalità dell'utilizzatore. Si raccomanda perciò una prova preliminare sulla superficie da trattare. Fila garantisce sempre la qualità dei suoi prodotti ma non si assume alcuna responsabilità per un loro impiego scorretto.



Recommended by over

240 INTERNATIONAL TOP BRANDS

manufacturers of materials for floors and wall coverings

Fila Industria Chimica Spa

Via Garibaldi, 58 - 35018 - S. Martino di Lupari (PD) - Italy

Tel. +39 049 9467300

filasolutions.com

The following Maintenance Sheet provides information for the maintenance of Agglotech's surfaces. These instructions explain how to use and apply FILA products and the tools necessary to carry out routine or extraordinary maintenance.

INITIAL CLEANING

After laying the material, we recommend washing it to remove residues. Use **CLEANER PRO**, a neutral detergent, for this purpose. Dilute this product in water at a ratio of 1:20 (300 ml in 5 litres of water).

Do not use acid products, which are too aggressive, even if diluted.



Download the technical sheet.

HOW TO USE IT

CLEANING USING A MACHINE

<p>STEP 1</p> <p>Sweep the floor thoroughly.</p>	<p>STEP 2</p> <p>Dilute 300 ml of CLEANER PRO in 5 litres of hot water (1:20).</p>	<p>STEP 3</p> <p>Evenly distribute the diluted CLEANER PRO solution, rubbing a few metres at a time.</p>	<p>STEP 4</p> <p>Wash with a single-disc floor scrubber, using a white or green disc.</p>	<p>STEP 5</p> <p>Collect any residue using a wet and dry vacuum cleaner and rinse.</p>	<p>STEP 6</p> <p>Do not walk on the surface before it's fully dry.</p>
---	--	--	--	---	---

MANUAL CLEANING

<p>STEP 1</p> <p>Sweep the floor thoroughly.</p>	<p>STEP 2</p> <p>Dilute 300 ml of CLEANER PRO in 5 litres of hot water (1:20).</p>	<p>STEP 3</p> <p>Evenly distribute the diluted CLEANER PRO solution, rubbing a few metres at a time.</p>	<p>STEP 4</p> <p>Use a scrubbing brush.</p>	<p>STEP 5</p> <p>Collect any residue using cloths and rinse.</p>	<p>STEP 6</p> <p>Do not walk on the surface before it's fully dry.</p>
---	--	--	--	---	---

In case of extraordinary dirt, It is possible to use PS87 PRO.

All information regarding recommended product use and application procedures is based on precise laboratory testing. Nevertheless, there are factors beyond our control: the condition of the surface before treatment, rare or unspecified material characteristics/finishes, environmental conditions and the professional training of the applicator. We recommend testing the product on an area of the surface prior to full application. FILA always guarantees the quality of its products but does not take responsibility for their improper use.

WATER- AND OIL-REPELLENT SEALER

To increase water and stain resistance, apply a layer of water- and oil-repellent product to the clean and dry surface. This treatment reduces the absorption of water and non-acid staining agents.

For this purpose, use one of the following products:

MP90ECO XTREME

Natural-effect, water-based, water and oil-repellent sealer

FOB XTREME

Natural-effect, solvent-based, water and oil-repellent sealer



Download the
technical sheet.

HOW TO USE IT

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5
<p>Clean the surface thoroughly.</p>	<p>Use a brush or a roller to apply the product on a dry and clean surface evenly and continuously, also impregnating the joints.</p>	<p>Rub it well before the product dries (approx. 10-15 minutes) and remove any residue using a microfibre cloth soaked with the product. You can use a single-disc floor scrubber.</p>	<p>Dry the area completely, so it doesn't remain glossy, oily, or sticky.</p>	<p>Do not walk on the surface before it's fully dry. Wait 24 hours before wetting the surface.</p>

Never apply the sealer onto a surface that is already waxed. Do not apply it during the hottest hours of the day in summer. Carry out a patch test on a small surface area to check for any changes in colour. Do not apply the product outdoors if rain is in forecast. Does not protect against acid aggression.

All information regarding recommended product use and application procedures is based on precise laboratory testing. Nevertheless, there are factors beyond our control: the condition of the surface before treatment, rare or unspecified material characteristics/finishes, environmental conditions and the professional training of the applicator. We recommend testing the product on an area of the surface prior to full application. FILA always guarantees the quality of its products but does not take responsibility for their improper use.



surface
care
solutions

Dirt-repellent finish

DIRT-REPELLENT FINISH

In case of internal floors, especially if light in color, after the application of the chosen sealer, it is advisable to complete the treatment applying a coat of a protective finish. The protection makes maintenance operations easier by facilitating the removal of superficial deposits. For this operation we recommend the use of

DIRTSHIELD


or

MATT (water-based natural effect wax)



Download the
technical data
sheet.

HOW TO USE IT

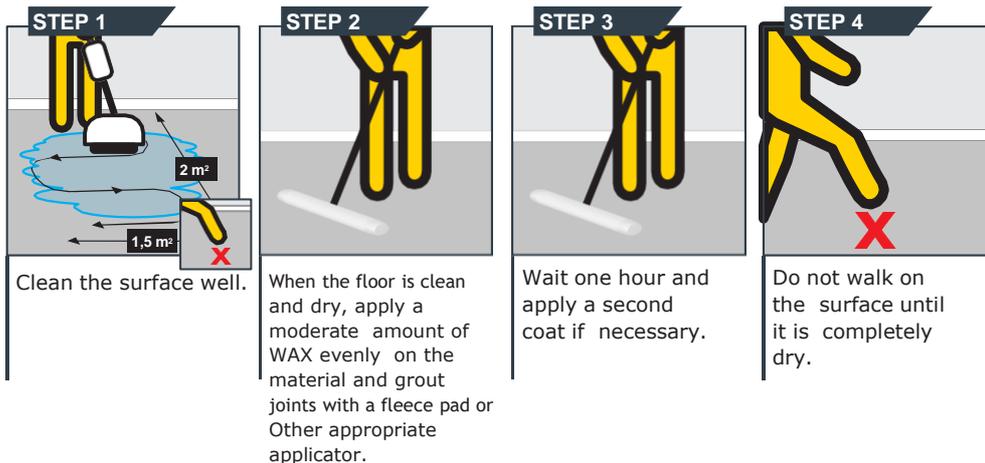

Restoring finish (every 2-3 months): after cleaning the surface with a diluted solution of CLEANER PRO (1:200), apply the finishing diluting 500 ml of product in 5 litres of water. The floor can be walked on once it is dry.

NOTE: The product can be removed by using the specific wax-remover for water-based waxes PS87 PRO. Not recommended for application on outdoor surfaces or in damp environments and where water tends to stagnate (bathrooms, showers). The product can change the appearance of the material, first spot test a small surface area to check for any changes.

All information regarding recommended product use and application procedures is based on precise laboratory testing. Nevertheless, there are factors beyond our control: the condition of the surface before treatment, rare or unspecified material characteristics/finishes, environmental conditions and the professional training of the applicator. We recommend testing the product on an area of the surface prior to full application. FILA always guarantees the quality of its products but does not take responsibility for their improper use.



Recommended by over

INTERNATIONAL TOP BRANDS

manufacturers of materials for floors and wall coverings

Fila Industria Chimica Spa

Via Garibaldi, 58 - 35018 - S. Martino di Lupari (PD) - Italy

Tel. +39 049 9467300

filasolutions.com



surface
care
solutions

Ordinary Maintenance

ROUTINE MAINTENANCE

To maintain the surfaces in a good state, we recommend cleaning them regularly using **CLEANER PRO**, a concentrated neutral detergent. This product cleans the surfaces without damaging or greasing them

On tops or walls, use **CLEAN&SHINE**, a ready-to-use cleaner. Spray this product on the surface and wipe using a damp microfibre cloth.



Download the technical sheet.

HOW TO USE IT

CLEANING USING A MACHINE

<p>STEP 1</p>	<p>STEP 2</p>	<p>STEP 3</p>	<p>STEP 4</p>
<p>Use a vacuum cleaner to remove dirt or dust.</p>	<p>Dilute CLEANER PRO at a ratio of 1:200, i.e. 25 ml in 5 l of water.</p>	<p>Set the washer-dryer and clean the surface.</p>	<p>Do not walk on the surface before it's fully dry.</p>

MANUAL CLEANING

<p>STEP 1</p>	<p>STEP 2</p>	<p>STEP 3</p>	<p>STEP 4</p>	<p>STEP 5</p>
<p>Sweep the floor thoroughly.</p>	<p>Dilute CLEANER PRO at a ratio of 1:200, i.e. 25 ml in 5 l of water.</p>	<p>Mop 2-3 m² at a time using the S-movement method.</p>	<p>Rinse and squeeze the mop before cleaning a new area. Wash the floor twice if needed.</p>	<p>Do not walk on the surface before it's fully dry.</p>

All information regarding recommended product use and application procedures is based on precise laboratory testing. Nevertheless, there are factors beyond our control: the condition of the surface before treatment, rare or unspecified material characteristics/finishes, environmental conditions and the professional training of the applicator. We recommend testing the product on an area of the surface prior to full application. FILA always guarantees the quality of its products but does not take responsibility for their improper use.



Recommended by over
INTERNATIONAL TOP BRANDS
manufacturers of materials for floors and wall coverings

Fila Industria Chimica Spa
Via Garibaldi, 58 - 35018 - S. Martino di Lupari (PD) - Italy
Tel. +39 049 9467300

filasolutions.com



surface care solutions

Extraordinary Maintenance

EXTRAORDINARY MAINTENANCE

In case of stubborn dirt, we recommend using **CLEANER PRO**, a neutral detergent. Dilute this product in water at a ratio of 1:30. It is perfect to restore the initial look of the surface.

Otherwise, use **PS87 PRO** diluted at a rate of 1:5 to remove wax residues or important dirt build – up.

When dealing with stubborn stains, use **NOSPOT** for oily stains or **ALGACID** for coloured organic stains.

To smooth fresh silicone during installation, we recommend using **SILICONE REFINER**. This product finishes fresh silicone neatly and evenly, leaving no residues on the material.



Download the technical sheet.

SMEARS

SUCTION CUP MARKS

GREASY SUBSTANCES

GLUE RESIDUES



Download the technical sheet.

SPECIAL CLEANING

CLEANER PRO 1:30

PS87 PRO

SMOOTHING
UNCURED SILICONE



Download the technical sheet.

SILICONE FRESH
MARKS

SILICONE REFINER



Download the technical sheet.

OILY STAINS

NOSPOT

COLOURED
ORGANIC STAINS

EXTERIOR
BLACKENING

STUBBORN
ORGANIC DIRT



Download the technical sheet.

ALGACID

All information regarding recommended product use and application procedures is based on precise laboratory testing. Nevertheless, there are factors beyond our control: the condition of the surface before treatment, rare or unspecified material characteristics/finishes, environmental conditions and the professional training of the applicator. We recommend testing the product on an area of the surface prior to full application. FILA always guarantees the quality of its products but does not take responsibility for their improper use.



Recommended by over

INTERNATIONAL TOP BRANDS

manufacturers of materials for floors and wall coverings

Fila Industria Chimica Spa

Via Garibaldi, 58 - 35018 - S. Martino di Lupari (PD) - Italy

Tel. +39 049 9467300

filasolutions.com